



Clips affixed PVC joint covers





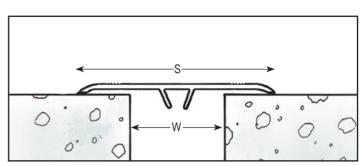

Clip S* For structural gaps varying in width from 10 to 35 mm. Clip SLL*
For structural
gaps varying in
width from
35 to 80 mm.



Clip XXL*
For structural gaps varying in width from 100 to 150 mm.

*	Patented	models
---	----------	--------

Initial joint width	Flat joint cover	Angle joint cover	Recommended clip	Number of clips per 3 lm length	
W [mm]	S [mm]	S [mm]	Recommended clip	Wall / Ceiling	Floor
20 - 35	CJV - CJH 050	CJV - CJH 050 A	S	5	10
35 - 50	CJV - CJH 070	CJV - CJH 070 A	S / SLL	5	10
40 - 70	CJV - CJH 090	CJV - CJH 090 A	SLL / XL	5	10
60 - 120	CJV - CJH 150	-	SLL / XL / XXL	5	10

The colours white RAL 9016, cream RAL 1015 and grey RAL 7035 are available from stock in 3 meter lengths in 50, 70 and 90 mm wide, flat and angle models. In order to avoid possible mistakes, it is important to check that the selected models of joint covers and clips are adapted to the concerned situation on job site

Technical ch	Test method		
Density	1.52	DIN 53479	
Vicat Fusion point	80 °C	DIN 53460 / B	
Modulus of elasticity	3200 MPa	DIN 534457	
Tensile strength	65 MPa	DIN 53455	
Ball hardness	120 MPa	DIN 53446	
Water absorption	0.04 %	DIN 53495	
Bending stress	92 MPa	DIN 53452	
Elongation	65 %	DIN 53455	
Notch impact strength at 23°C	5.5 KJ / m²	DIN 53453	
Linear tolerance	± 0.7 %	DIN 16941	
Linear expansion coefficient	8 x 10 ⁻⁵ K ⁻¹	DIN 53752	
Fire resistance	B2	-	

The clips affixed PVC joint covers are made of non-recycled material, according to the latest available technology. They do not contain any lead, cadmium or formaldehyde and are suitable for exterior use.

CERTIFICATIONS:

PVC: manufactured in compliance with ISO 9001

Stainless steel clips: certifications ISO 14001 - ISO/TS 16949 - ISO 9001

© All rights reserved - Non contractual drawings - 01/2025

