

Folded joint covers


For gaps up to 500 mm

CJP


The range of folded joint covers is designed to provide an attractive and decorative low cost solution to the problem of protecting and concealing expansion joints in the structure of a building.

They are suitable for use in new or refurbishment projects for walls, ceilings and floors, for gaps up to 500mm.

They are available in aluminium, galvanized or stainless steel and brass and can be installed in all types of buildings : office buildings, shopping malls and retail stores, schools, hospitals, hotels, blocks of flats, municipal buildings, leisure centres, factories, airport terminals, rail terminals...



Flat joint covers



Angle joint covers

CJP	Dimensions (A + B + C)	Gap W [mm]
CJP-200	15 + 170 + 15 = 200	0 to 75
CJP-250	15 + 220 + 15 = 250	75 to 100
CJP-300	15 + 270 + 15 = 300	100 to 150
CJP-350	15 + 320 + 15 = 350	150 to 200
CJP-400	15 + 370 + 15 = 400	200 to 250
CJP-450	15 + 420 + 15 = 450	250 to 300
CJP-500	15 + 470 + 15 = 500	300 to 350
CJP-550	15 + 520 + 15 = 550	350 to 400
CJP-600	15 + 570 + 15 = 600	400 to 450
CJP-650	15 + 620 + 15 = 650	450 to 500

CJP	Dimensions (A + B + C + D)	Gap W [mm]
CJP-125 A	10 + 50 + 110 + 15	0 to 75
CJP-175 A	10 + 50 + 160 + 15	75 to 100
CJP-225 A	10 + 50 + 210 + 15	100 to 150
CJP-275 A	10 + 50 + 260 + 15	150 to 200
CJP-325 A	10 + 50 + 310 + 15	200 to 250
CJP-375 A	10 + 50 + 360 + 15	250 to 300
CJP-425 A	10 + 50 + 410 + 15	300 to 350
CJP-475 A	10 + 50 + 460 + 15	350 to 400
CJP-525 A	10 + 50 + 510 + 15	400 to 450
CJP-575 A	10 + 50 + 560 + 15	450 to 500

Finishings :

- Mill finish aluminium
- Anodized aluminium
- Powder coated aluminium (RAL colours)
- Galvanized steel
- 304 or 316 stainless steel
- Brass


Installation :

- Bonding : silicon sealant, polyuréthane, MS polymer
- Screws and plugs (contact us for specifications)
- VED POXY chemical sealing

Available thicknesses :

From 8/10^e

© All rights reserved - Non contractual drawings - 05/2025



GV2 VEDA FRANCE

20, Allée des Erables - Bât E - 93420 Villepinte - France


Postal address

CS 63052 - 95972 Roissy CDG Cedex

+ 33 (0)1 48 61 70 80

export@vedafrance.com

www.vedafrance.com

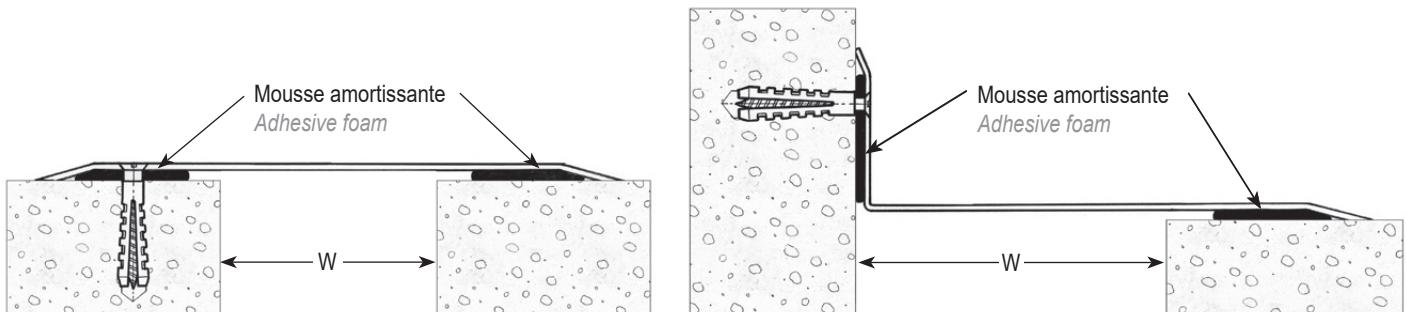

* Mousse amortissante fournie en option / Adhesive foam optional

Standard drilling :

Drilled on one side every 400mm, first and last hole at 10cm from each ends, i.e 7 holes per length of 3 meters. Drilling diameter 8 mm, countersunk 10mm.

Special drillings :

Drilled on both sides, one standard hole on one side and one oblong hole on the other side in order to guide and to secure the joint during its movement.

Drilled on both sides, oblong holes.

Waterproofing and insulation :

A special adhesive polyethylene type can be supplied in option for waterproofing, sound insulation and in order to avoid heat bridges.



Drilled, countersunk one side