



## Clips affixed aluminium joint covers

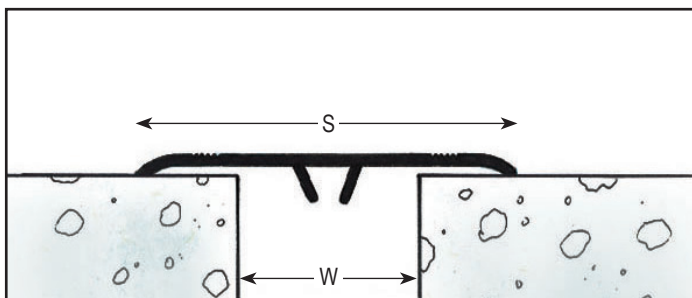

**Clip S\***  
For joints with an initial width of between 20 and 35mm.

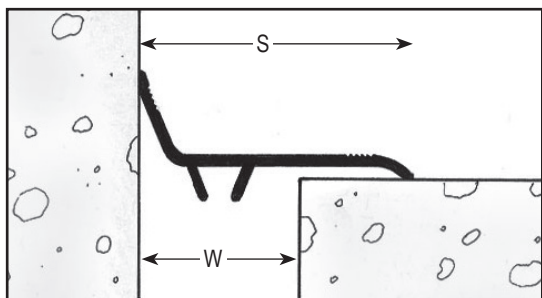

**Clip SLL\***  
For joints with an initial width of between 35 and 80mm.



**Clip XL\***  
For joints with an initial width of between 60 and 110mm.



**Clip XXL\***  
For joints with an initial width of between 100 and 150mm.

\* Patented models

Initial joint width W* [mm]	Flat joint cover S [mm]	Angle joint cover S [mm]	Recommended clip	Number of clips per 3 lm length
				Wall / Ceiling
20 - 35	CJ 050	CJ 050 A	S	4
20 - 40	CJ 060	CJ 060 A	S / SLL	4
35 - 50	CJ 070	CJ 070 A	S / SLL	4
40 - 70	CJ 090	CJ 090 A	SLL / XL	4
60 - 90	CJ 120	CJ 120 A	SLL / XL	4
90 - 110	CJ 140	-	XL	4 / 5

\*It is possible to use a joint cover without a clip in a joint with an opening of 10mm or more. To be glued on one side.

Joint covers can only be installed on the ground in the case of light pedestrian traffic. Contact us. To avoid any risk of error, it is important to check the suitability of the selected clip and cover joint models on site.

### CHEMICAL COMPOSITION OF ALUMINIUM 6063 T6 ALLOY

%	Si	Fe	Cu	Mn	Mg	Cr	Zn	Ti	Others
Minimum	0.20	-	-	-	0.45	-	-	-	-
Maximum	-	0.35	0.10	0.10	0.90	0.10	0.10	0.10	0.05

### TYPICAL PHYSICAL PROPERTIES

Density	2.70
Melting range °C	615 - 655
Coefficient of linear expan (0 à 100°C) - °C <sup>-1</sup> x10 <sup>6</sup>	23.4
Ratio by Poisson	0.33
Thermal conductivity	200
Resistivity at 20°C - μΩ cm	3.3
Specific heat J / kg °C	940

### MECHANICAL PROPERTIES AT ROOM TEMPERATURE

Temper	T6
Strength index	R19

### TENSILE PROPERTIES

Rp 0.2 mini	Rm mini	A 5.65
0.2 % min.	UTS min.	% mini
MPa	Mpa	
160	185	8

### CERTIFICATIONS

Extruded aluminium : manufactured in compliance with BS EN ISO 9001 : Anodizing according to BS 1615 and BS 3987

Stainless steel clips : certifications ISO 14001 - ISO/TS 16949 - ISO 9001.