



VEDA FRANCE
 Joints bâtiment - Building joints


Joint de dilatation de sol

Mechanical floor joint


Series JDH 5.10

Joint de dilatation de sol pour extérieur et intérieur constitué de cornières en laiton et d'un insert souple interchangeable pour tous types de finitions : dalle, chape, carrelage, marbre...

Mechanical floor expansion joint made of brass side plates and interchangeable for all types of finishes : screed, natural stone, cast stone, marble...

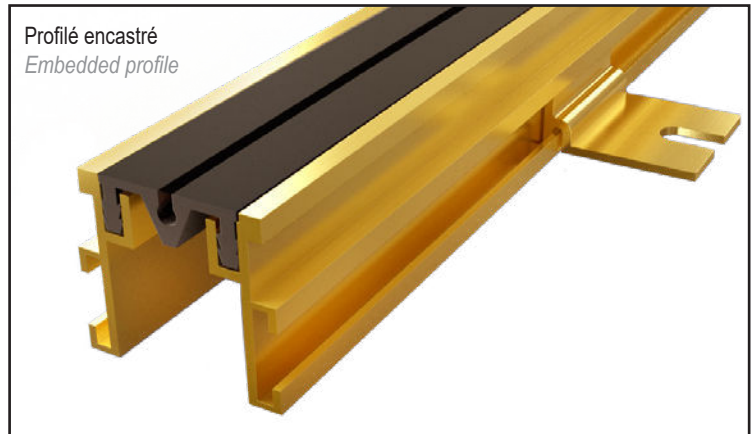

JDH 5.10

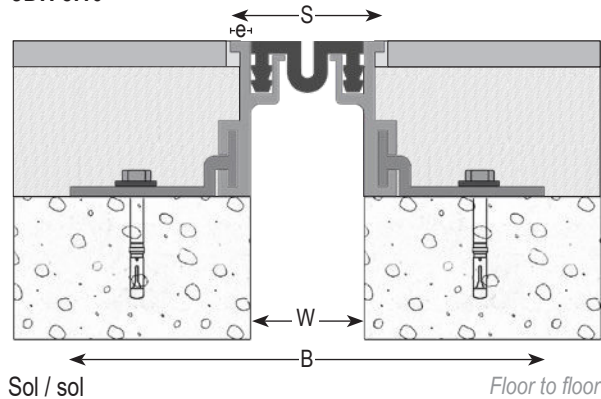

Ref. JDH 5.10	5.10-030
W [mm] ouverture / Gap up to [mm]	30
H [mm] hauteur / Depth [mm]	40
S [mm] approx.	40
B [mm] approx.	115
e [mm] approx.	5
Mouvements admissibles [mm] Accommodation of movements [mm]	+10 / -5
Couleur de l'insert / Insert color	Noir, gris / Black, grey
Matériau / Material	Laiton, nitrile / Brass, nitrile
Longueur standard [ml] / Standard length [lm]	3
Equerres de fixation [par mètre] / Number of fixings [per meter]	4
Charge [kN] / Load-bearing capacity [kN]	

The load-bearing capacity is always indicated for a joint in its initial position. In case of opening movements, the load-bearing capacity significantly reduces and the product will thus be only adapted for a light pedestrian traffic. The indicated load-bearing capacities are based on pneumatic wheels vehicles with a contact surface of 200x200 mm.

© All rights reserved - Non contractual drawings - 02/2020



GV2 VEDA FRANCE
 20, Allée des Erables - Bât. E - 93420 Villepinte - France
 Adresse Postale
 CS 63052 - 95972 Roissy CDG Cedex

Tél : + 33 (0)1 48 61 70 80
Fax : + 33 (0)1 48 61 70 81
E-mail : contact@vedafrance.com
Web : www.vedafrance.com