



VEDA FRANCE

Jointes bâtiment - Building joints


Joint de dilatation de sol

Mechanical floor joint


Series JDH 5.26 R+3

Profil rapporté pour joint de dilatation de sol intérieur ou extérieur constitué de cornières percées fraisées en aluminium et d'un insert souple thermosoudable. Spécialement adapté pour des finitions de type sol souple ou résine.


Surface mounted floor expansion joint profile for interior or exterior. Made of drilled and countersunk aluminium side plates associated with a hot weldable flexible insert. Specially adapted for resilient flooring or resin finishes.

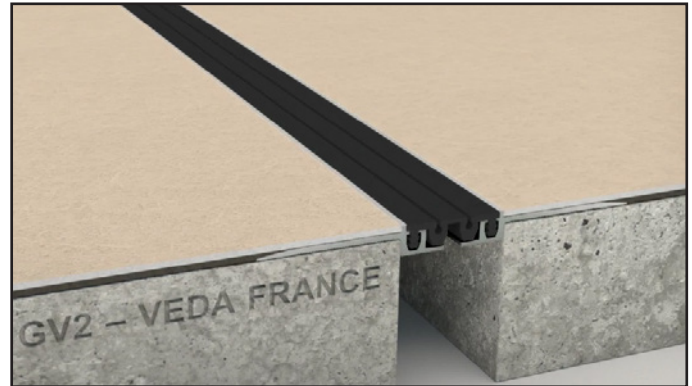


JDH 5.26 R+3-020

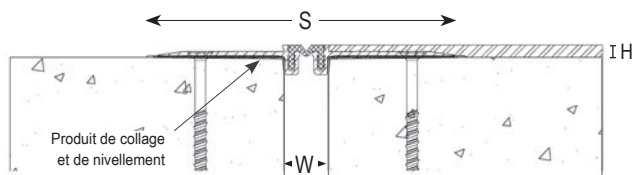

JDH 5.26 R+3-050 A (Angle)

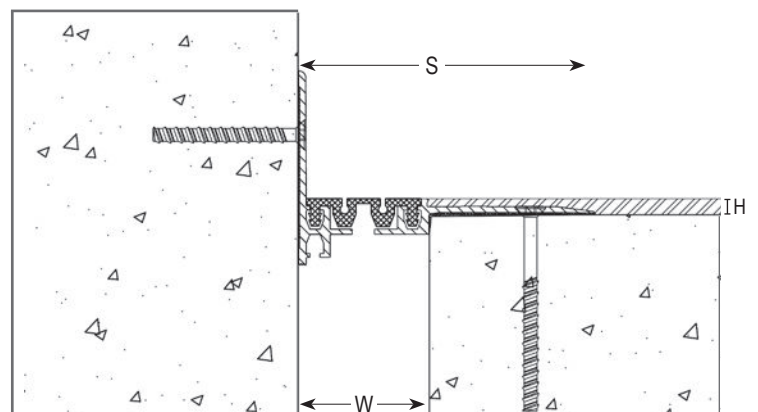

JDH 5.26 R+3-040

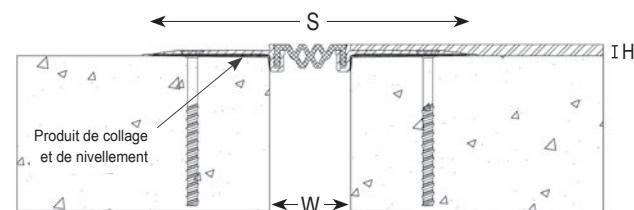

Ref. JDH 5.26 R+3	5.26 R+3-020	5.26 R+3-030	5.26 R+3-040	5.26 R+3-050	5.26 R+3-060
W [mm] ouverture / Gap up to [mm]	20	30	40	50	60
H [mm] hauteur / Depth [mm]	2,5			3	
S [mm] approx.	140	150	160	180	195
Mouvements admissibles [mm] Accommodation of movements [mm]	+3 / -3	+7 / -7	+10 / -10	+7 / -7	+10 / -10
Couleur de l'insert / Insert color	Noir, gris* / Black, grey*				
Matériau / Material	Aluminium, nitrile / Aluminium, nitrile				
Longueur standard [m] / Standard length [m]	3				
Charge [kN] Load-bearing capacity [kN]					

* Insert lisse uniquement disponible en 5.26 R+3-050 (autres ouvertures nous consulter) / Smooth insert available only on 5.26 R+3-050 (other gaps upon request).

Thermosoudures d'insert préconisées pour les raccords / Hot-welding recommended for junction of the flexible insert

Cornières percées pour vis TF 6 / Side plates drilled for screw TF 6

The load-bearing capacity is always indicated for a joint in its initial position. In case of opening movements, the load-bearing capacity significantly reduces and the product will thus be only adapted for a light pedestrian traffic. The indicated load-bearing capacities are based on pneumatic wheels vehicles with a contact surface of 200x200 mm.

© All rights reserved - Non contractual drawings - 02/2020



GV2 VEDA FRANCE
20, Allée des Erables - Bât. E - 93420 Villepinte - France
Adresse Postale
CS 63052 - 95972 Roissy CDG Cedex

Tél : + 33 (0)1 48 61 70 80
Fax : + 33 (0)1 48 61 70 81
E-mail : contact@vedafrance.com
Web : www.vedafrance.com