



VEDA FRANCE

Joints bâtiment - Building joints

Joint de parking étanche Watertight car park joint

Series JDH 5.31


Joint de dilatation de sol étanche pour parkings, rampes d'accès, esplanades, et tout autre lieu avec circulation ou non de véhicules à faible vitesse. Il est constitué de deux brides percées fraisée en aluminium brut striées ou acier galvanisé ou inox de dimensions variables et d'un profilé souple étanche.



Watertight floor expansion joint for car parks and any other places with or without traffic of slow vehicles. It is made of two mill finish aluminium or galvanized steel or stainless steel side plates or stainless steel and an interchangeable

Profilé rapporté
Surface mounted profile



JDH 5.31

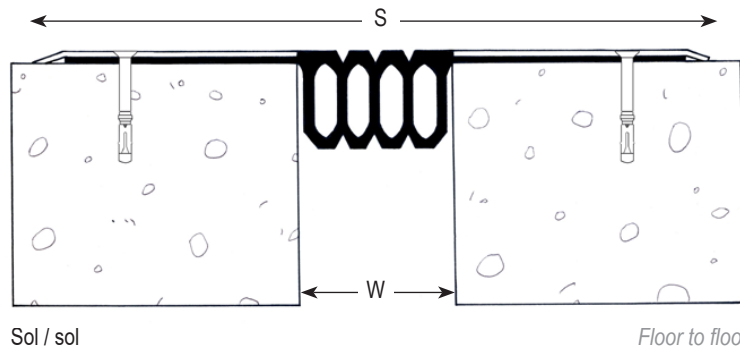

Ref. JDH 5.31	5.31
W [mm] ouverture / Gap up to [mm]	45
S [mm] approx.	160 à / to 190
Mouvements admissibles [mm] Accommodation of movements [mm]	-15 / +15 mm
Couleur de l'insert / Insert color	Noir. Insert gris nous consulter / Black. Grey insert upon request.
Matériau / Material	Aluminium brut ou acier galvanisé ou inox (304 ou 316), nitrile Mill finish aluminium or galvanized steel or stainless steel (304 or 316), nitrile
Fixation / Installation	Fixations disponibles sur stock. Nous consulter Fixings available from stock. Upon request.
Longueur standard [m] / Standard length [m]	Insert : Rouleaux de 18 ml - Brides : Longueurs de 3 ml Insert : 18 m rolls - Side plates : 3 m lengths
Charge [kN] Load-bearing capacity [kN]	  90 kN

Existe aussi en version sol/mur. / Floor to wall profile also available.

Thermosoudures d'insert préconisées pour les raccords et remontées. / Hot-welding recommended for junction of the flexible insert and upstand.

The load-bearing capacity is always indicated for a joint in its initial position. In case of opening movements, the load-bearing capacity significantly reduces and the product will thus be only adapted for a light pedestrian traffic. The indicated load-bearing capacities are based on pneumatic wheels vehicles with a contact surface of 200x200 mm.

© All rights reserved - Non contractual drawings - 08/2020

ISO 9001:2015

BUREAU VERITAS
Certification



GV2 VEDA FRANCE

20, Allée des Erables - Bât. E - 93420 Villepinte - France

Adresse Postale

CS 63052 - 95972 Roissy CDG Cedex

Tél : + 33 (0)1 48 61 70 80

Fax : + 33 (0)1 48 61 70 81

E-mail : contact@vedafrance.com

Web : www.vedafrance.com