



VEDA FRANCE

Joint s bâtiment - Building joints

Joint de parking Car park joint

Series JDH 5.35


Joint de dilatation de sol pour parkings, rampes d'accès, esplanades, et tout autre lieu avec circulation ou non de véhicules légers à faible vitesse. Finition en caoutchouc SBR/NR pour absorber les nuisances sonores.

Floor expansion joint for car parks, access ramps, esplanades and any other place with or without traffic of slow light-vehicles. SBR/NR rubber finish in order to reduce the shock noises.



Profilé rapporté
Surface mounted profile

JDH 5.35

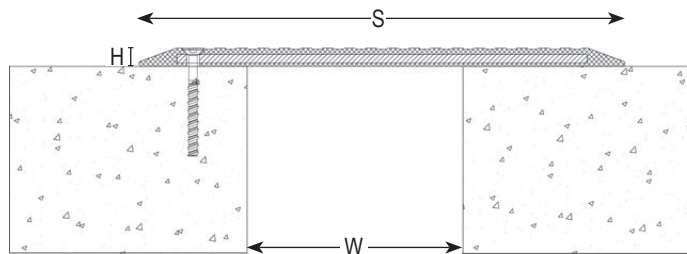

Ref. JDH 5.35	5.35-100	5.35-200	5.35-400	5.35-600
W [mm] Ouverture jusqu'à* / Gap up to*	100	200	400	600
H [mm] Hauteur / Depth	12	17	19	21
S [mm] approx.	300	450	750	900
Mouvements admissibles [mm] Movement capacities [mm]	+50 / -100	+100 / -200	+200 / -400	+200 / -600
Matériaux / Materials	Caoutchouc SBR/NR, acier / SBR/NR rubber, steel			
Longueur standard [ml] / Standard length [lm]	2		1,5	
Charges / Load-bearing capacities				

*Autres ouvertures sur demande. / Other gap upon request.

The load-bearing capacity is always indicated for a joint in its initial position. In case of opening movements, the load-bearing capacity significantly reduces and the product will thus be only adapted for a light pedestrian traffic. The indicated load-bearing capacities are based on pneumatic wheels vehicles with a contact surface of 200x200 mm.

© All rights reserved - Non contractual drawings - 07/2021



GV2 VEDA FRANCE
20, Allée des Erables - Bât. E - 93420 Villepinte - France
Adresse Postale
CS 63052 - 95972 Roissy CDG Cedex

Tél : + 33 (0)1 48 61 70 80
Fax : + 33 (0)1 48 61 70 81
E-mail : contact@vedafrance.com
Web : www.vedafrance.com