



VEDA FRANCE

Joints bâtiment - Building joints

Joint de dilatation de sol industriel

Mechanical floor joint


Series JDH 6.05

Joint de dilatation de sol spécial charges lourdes (chariots élévateurs, camions...).


La conception spéciale de ce profilé permet d'éviter tout ressaut lors du passage d'engins. Parfaitement adapté pour les applications industrielles, les zones circulées par des systèmes automatisés et pour les engins d'entretiens et de manutentions.

All metal floor expansion joint for heavy duty (forklifts, trucks...).

This profile is specially designed to avoid any vibrations when vehicles are passing over it. Perfectly suited for industrial applications, areas with automated systems and for maintenance and handling equipment.

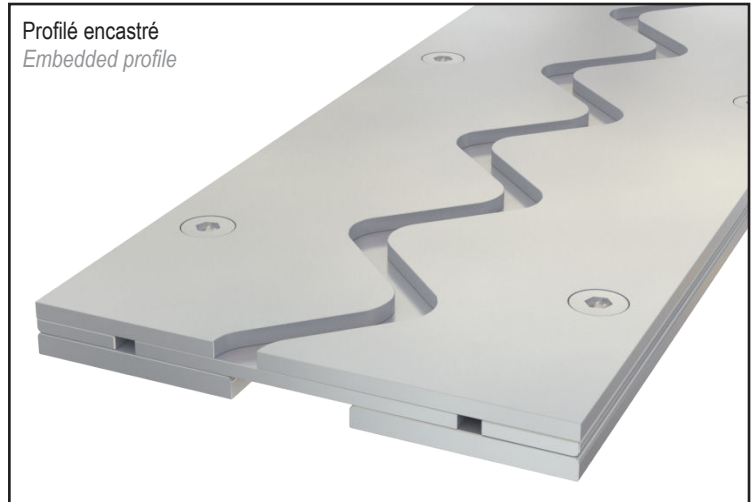

JDH 6.05-050

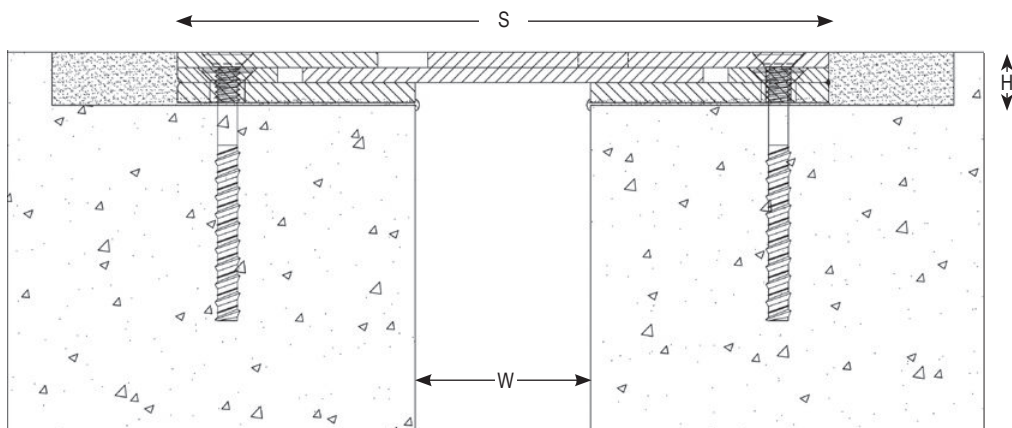


Ref. JDH 6.05	6.05-050	6.05-070
W [mm] ouverture jusqu'à / Gap up to [mm]	0 - 50	50 - 70
H [mm] hauteur / Depth [mm]	19	20
S [mm] approx.	185	260
Mouvement horizontal [mm] / Horizontal movement [mm]	+15 / -15	+20 / -20
Matériau / Material	Acier ou acier inoxydable / Steel or stainless steel	
Longueur standard [m] / Standard length [m]	2,99*	2
Charge [kN] / Load-bearing capacity [kN]		

*Autres longueurs sur demande. / Other lengths upon request.

The load-bearing capacity is always indicated for a joint in its initial position. In case of opening movements, the load-bearing capacity significantly reduces and the product will thus be only adapted for a light pedestrian traffic. The indicated load-bearing capacities are based on pneumatic wheels vehicles with a contact surface of 200x200 mm.

© All rights reserved - Non contractual drawings - 06/2020

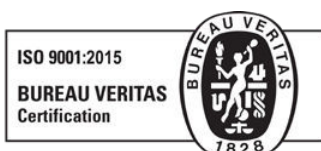

GV2 VEDA FRANCE

20, Allée des Erables - Bât. E - 93420 Villepinte - France

Adresse Postale

CS 63052 - 95972 Roissy CDG Cedex

Tél : + 33 (0)1 48 61 70 80

Fax : + 33 (0)1 48 61 70 81

E-mail : contact@vedafrance.com

Web : www.vedafrance.com