


Series JDH 6.16

Grande largeur, charges très lourdes / Extra wide, heavy duty

Joint de dilatation de sol tout métal pour extérieur et intérieur constitué de 2 cornières et d'une partie centrale en aluminium de forte épaisseur permettant les mouvements de dilatation et de contraction ainsi que les mouvements verticaux et de cisaillement.

All metal floor expansion joint for exterior and interior use, made of 2 drilled aluminium side plates and a heavy duty aluminium central plate allowing expansion and contraction of the joint as well as vertical movement and shear movement.

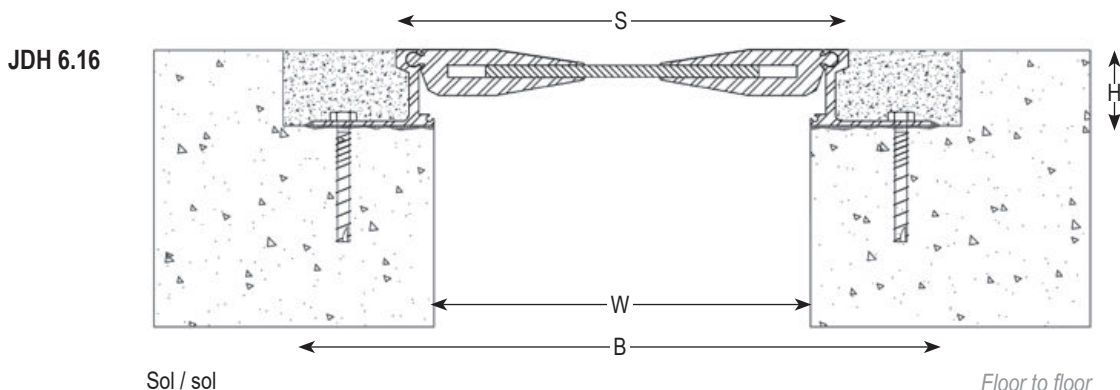

Ref. JDH 6.16	6.16-250
W [mm] ouverture / Gap up to [mm]	250
H [mm] hauteur / Depth [mm]	50 / 80
S [mm] approx.	300
B [mm] approx.	410
Mouvements admissibles [mm] Accommodation of movements [mm]	Horizontal +50 / -50
Matériau / Material	Aluminium / Aluminium
Longueur standard [ml] / Standard length [lm]	2
Charge [kN] Load-bearing capacity [kN]	

Existe aussi en version sol/mur. / Floor to wall profile also available.

The load-bearing capacity is always indicated for a joint in its initial position. In case of opening movements, the load-bearing capacity significantly reduces and the product will thus be only adapted for a light pedestrian traffic. The indicated load-bearing capacities are based on pneumatic wheels vehicles with a contact surface of 200x200 mm.

© All rights reserved - Non contractual drawings - 01/2019