



VEDA FRANCE

Joints bâtiment - Building joints

Joint de dilatation de sol Inox Stainless steel floor expansion joint

Series JDH 6.32

Joint de dilatation de sol en acier inoxydable pour extérieur et intérieur.

Adapté pour tous types de finitions : dalle, chape, carrelage, marbre...

Finitions inox brut, poli, brossé ou brillant.

Stainless steel mechanical floor expansion joint for all types of finishes : screed, natural stone, cast stone, marble...

Raw, polished, high glass or brushed stainless steel finishing.




Profilé encastré
Embedded profile

JDH 6.32



JDH 6.32

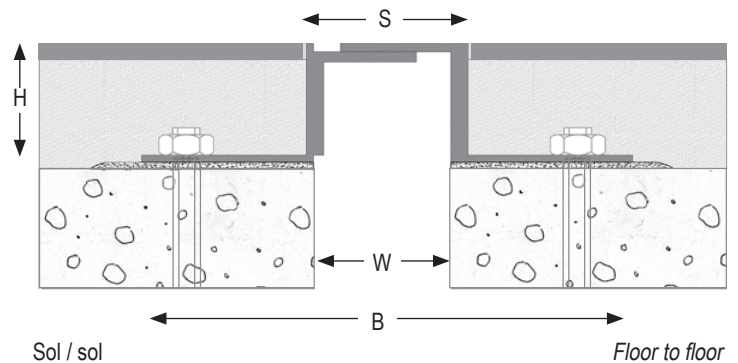

Ref. JDH 6.32	6.32-020	6.32-030	6.32-040	6.32-050	6.32-060
W [mm] ouverture / Gap up to [mm]	20	30	40	50	60
H [mm] hauteur / Depth [mm]	30 à / to 100		35 à / to 100	40 à / to 100	50 à / to 100
S [mm] approx.	30	37	45	55	68
B [mm] approx.	128	133	143	165	205
Mouvements admissibles [mm] Accommodation of movements [mm]	+5 / -5	+8 / -8	+10 / -10	+13 / -13	+15 / -15
Matériau / Material	Acier inoxydable (304 ou 316) / Stainless steel (304 or 316)				
Longueur standard [m] / Standard length [m]	3				
Charge [kN] Load-bearing capacity [kN]					

The load-bearing capacity is always indicated for a joint in its initial position. In case of opening movements, the load-bearing capacity significantly reduces and the product will thus be only adapted for a light pedestrian traffic. The indicated load-bearing capacities are based on pneumatic wheels vehicles with a contact surface of 200x200 mm.

© All rights reserved - Non contractual drawings - 05/2020



GV2 VEDA FRANCE

20, Allée des Erables - Bât. E - 93420 Villepinte - France

Adresse Postale

CS 63052 - 95972 Roissy CDG Cedex

Tél : + 33 (0)1 48 61 70 80

Fax : + 33 (0)1 48 61 70 81

E-mail : contact@vedafrance.com

Web : www.vedafrance.com