

# Joint de dilatation de sol tout métal


## All metal floor expansion joint

**Series JDH 6.34**  
 Charges lourdes / Heavy duty


Joint de dilatation de sol tout métal pour extérieur et intérieur. Spécial passage de charges lourdes. Le pare vapeur peut-être livré en une seule pièce de la longueur exacte du joint de dilatation, sans raccord.

*All metal floor expansion joint for exterior and interior use. Heavy duty.*

*The vapour barrier can be delivered separately in one length upon request (no interruption at butt joints).*

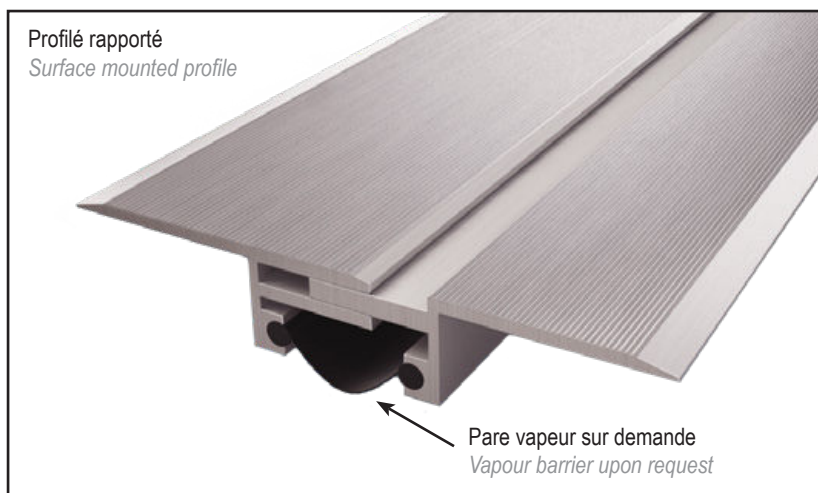


**JDH 6.34**

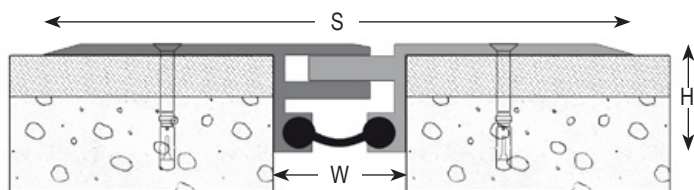

Sol / sol

Floor to floor

**JDH 6.34 A**

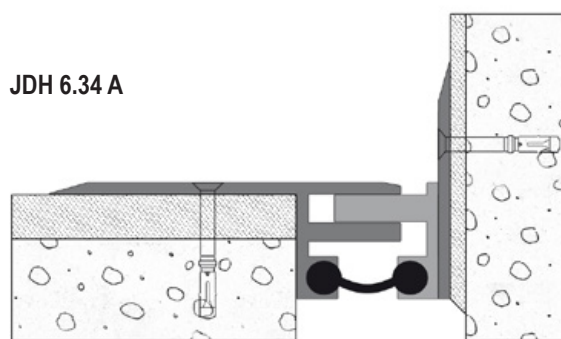

Sol / mur

Floor to wall

Ref. JDH 6.34	6.34-035	6.34-050
W [mm] ouverture / Gap up to [mm]	35	50
H [mm] hauteur / Depth [mm]	30	30
S [mm] approx.	155	170
Mouvements admissibles [mm] Accommodation of movements [mm]	+6 / -6	+8 / -8
Matériau / Material	Aluminium / Aluminium	
Longueur standard [m] / Standard length [m]	4	
Charge [kN] Load-bearing capacity [kN]		

Perçage, fraisage sur demande. / Can be supplied drilled countersunk upon request.

The load-bearing capacity is always indicated for a joint in its initial position. In case of opening movements, the load-bearing capacity significantly reduces and the product will thus be only adapted for a light pedestrian traffic. The indicated load-bearing capacities are based on pneumatic wheels vehicles with a contact surface of 200x200 mm.

© All rights reserved - Non contractual drawings - 01/2019