

Series CP

Profilés souples en EPDM ou PVC destinés à être installés au sol et fixés avec une colle spéciale.




Les alvéoles internes supportent jusqu'à 50 % de mouvements multidirectionnels, tout en conservant une portance suffisante pour absorber le trafic.


Profilés résistants aux hydrocarbures et aux UV, qui doivent être installés au moins 5 mm en dessous de la surface de roulement.

Flexible expansion joints in EPDM or PVC to be installed on floor, sealed with a special glue.

Internal cell's design allows up to 50% multidirectional movements while maintaining sufficient lift to absorb the traffic.

Hydrocarbon and UV resistant profiles, to be installed at least 5mm below the floor level.

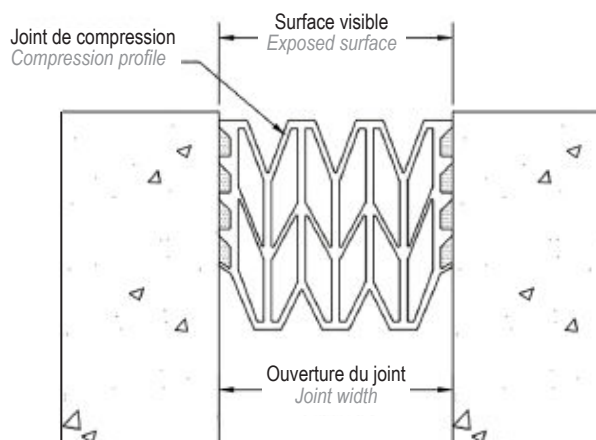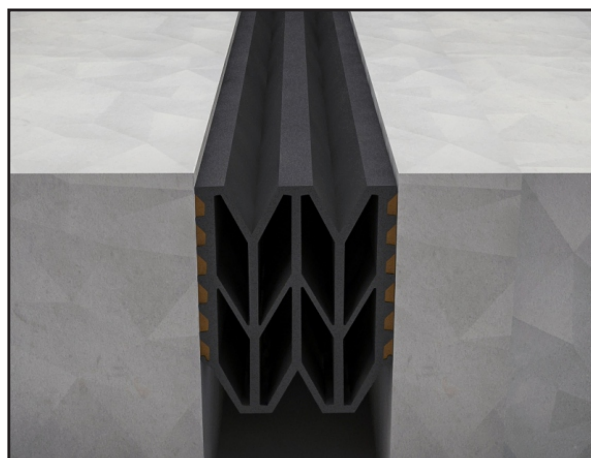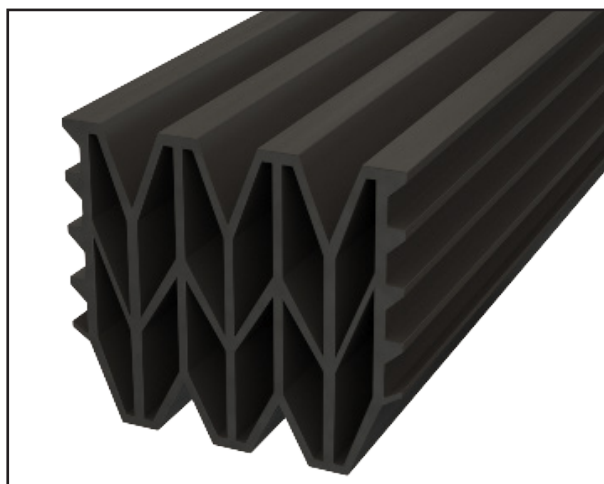

Ref. CP	CP-025	CP-050	CP-075	CP-100
W [mm] Ouverture / Gap up to	25	50	75	100
H [mm] Hauteur / Depth	57	63,5	63,5	89
Ouverture minimum [mm] / Minimum opening	13	20	38	51
Ouverture maximum [mm] / Maximum opening	38	85	114	152
Matériau / Material	EPDM ou / or PVC			
Couleur / Color	Noir / Black			
Longueur standard [ml] / Standard Length [lm]	Rouleaux de 25 ml / 25 lm rolls			
Charge [kN] / Load-bearing capacity [kN]				

The load-bearing capacity is always indicated for a joint in its initial position. In case of opening movements, the load-bearing capacity significantly reduces and the product will thus be only adapted for a light pedestrian traffic. The indicated load-bearing capacities are based on pneumatic wheels vehicles with a contact surface of 200x200 mm.

© All rights reserved - Non contractual drawings - 11/2020