


**Series JDH 5.35**

Joint de dilatation de sol pour parkings, rampes d'accès, esplanades, et tout autre lieu avec circulation ou non de véhicules légers à faible vitesse. Finition en caoutchouc SBR/NR pour absorber les nuisances sonores.

*Floor expansion joint for car parks, access ramps, esplanades and any other place with or without traffic of slow light-vehicles. SBR/NR rubber finish in order to reduce the shock noises.*



JDH 5.35

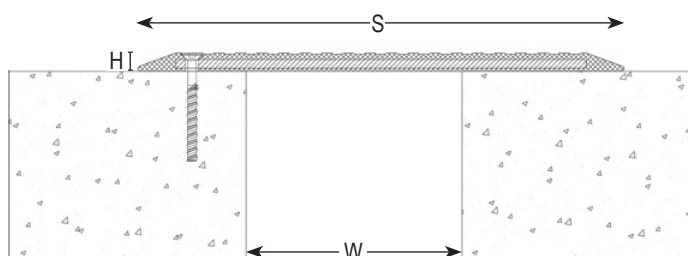

Ref. JDH 5.35	5.35-200	5.35-600
W [mm] ouverture jusqu'à* / Gap up to [mm]*	200	600
H [mm] hauteur / Depth [mm]	17	21
S [mm] approx.	450	900
Mouvements admissibles [mm] Movement capacities [mm]	+100 / -100	
Matériaux / Materials	Caoutchouc SBR/NR, acier / SBR/NR rubber, steel	
Longueur standard [m] / Standard length [m]	2	1,5
Charges [kN] / Load-bearing capacities [kN]		

\*Autres ouvertures sur demande. / Other gap upon request.

The load-bearing capacity is always indicated for a joint in its initial position. In case of opening movements, the load-bearing capacity significantly reduces and the product will thus be only adapted for a light pedestrian traffic. The indicated load-bearing capacities are based on pneumatic wheels vehicles with a contact surface of 200x200 mm.

© All rights reserved - Non contractual drawings - 02/2021