




Joint de dilatation de sol tout métal pour extérieur et intérieur constitué de cornières et d'une partie centrale en aluminium. Pour tous types de finitions : dalle, chape, carrelage, marbre...

All metal floor expansion joint for exterior and interior use, made of 2 aluminium side plates and an aluminium central part. For all types of finishes: screed, natural stone, cast stone, marble...

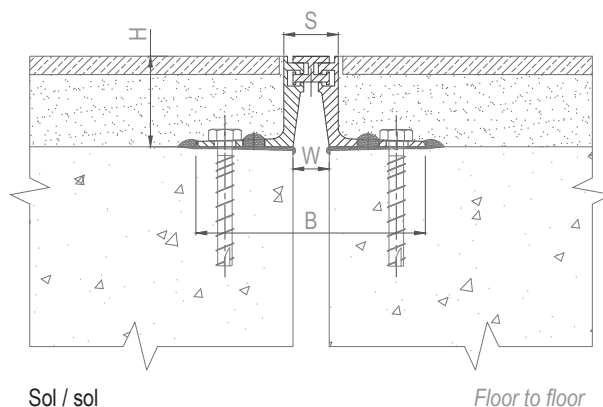

JDH 6.06



Ref. JDH 6.06	6.06-020
W [mm] Ouverture jusqu'à / Gap up to	20
H [mm] Hauteur / Depth	20 / 50
S [mm] approx.	30
B [mm] approx.	127
Mouvements admissibles [mm] Movement capacities [mm]	+3 / -3
Matériau / Material	Aluminium / Aluminium
Longueur standard [ml] / Standard length [lm]	3
Charges [kN] Load-bearing capacities [kN]	 

Fixations : nous consulter pour préconisation. / Fixings: please contact us for technical recommendation.

Veillez nous consulter pour vérifier l'utilisation du produit avec des engins à roues non pneumatiques. / Please contact us in case of traffic of vehicles with non-pneumatic wheels.

The load-bearing capacity is always indicated for a joint in its initial position. In case of opening movements, the load-bearing capacity significantly reduces and the product will thus be only adapted for a light pedestrian traffic. The indicated load-bearing capacities are based on pneumatic wheels vehicles with a contact surface of 200x200 mm.

© All rights reserved - Non contractual drawings - 11/2021