

Joint de dilatation de sol sismique tout métal intérieur spécial revêtement thermoplastique ou moquette de 3 mm.


All metal seismic floor expansion joint interior special thermoplastic or 3mm carpet finishings.



JDH 6.26-050 A avec cornière invisible
With invisible side plate

JDH 6.26-050 A avec cornière apparente
With visible side plate

JDH 6.26-050

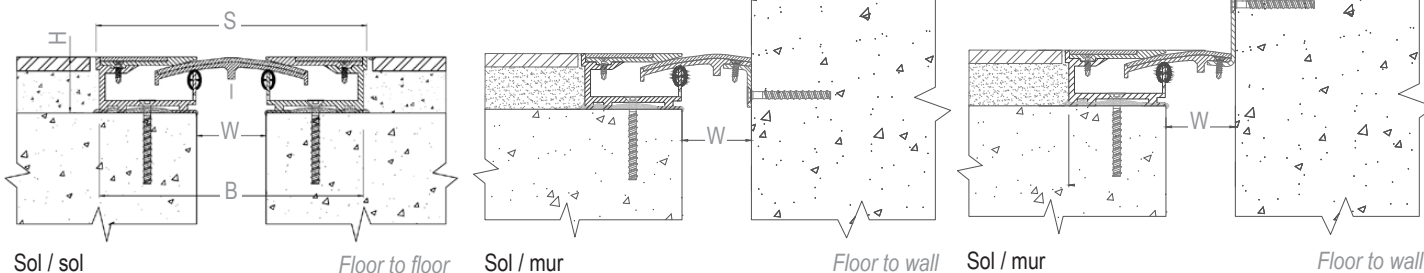

Ref. JDH 6.26	6.26-050	6.26-100	6.26-150
W [mm] Ouverture jusqu'à / Gap up to	50	100	150
H [mm] Hauteur / Depth	40		
S [mm] approx.	195	330	
B [mm] approx.	190	325	
Mouvements admissibles [mm] Movement capacities [mm]	+50 / -40	+80 / -100	
Matériau / Material	Aluminium / Aluminium		
Longueur standard [ml] / Standard length [lm]	3		
Charges / Load-bearing capacities			

Fixations : nous consulter pour préconisation. / Fixings: please contact us for technical recommendation.

The load-bearing capacity is always indicated for a joint in its initial position. In case of opening movements, the load-bearing capacity significantly reduces and the product will thus be only adapted for a light pedestrian traffic. The indicated load-bearing capacities are based on pneumatic wheels vehicles with a contact surface of 200x200 mm.

© All rights reserved - Non contractual drawings - 11/2021