


Joint de dilatation de sol tout métal

All metal floor expansion joint


Series JDH 6.34

Joint de dilatation de sol aluminium pour extérieur et intérieur. Pour tous types de finitions : dalle, chape, carrelage, marbre...

Aluminium floor expansion joint for exterior and interior use. For all types of finishes: screed, natural stone, cast stone, marble...

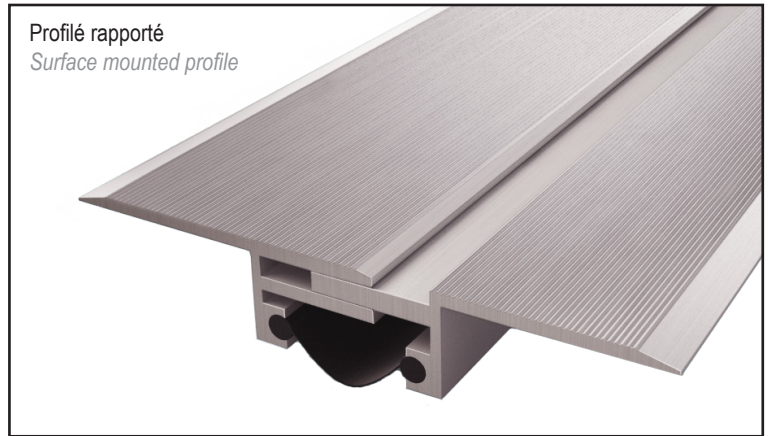

JDH 6.34-035

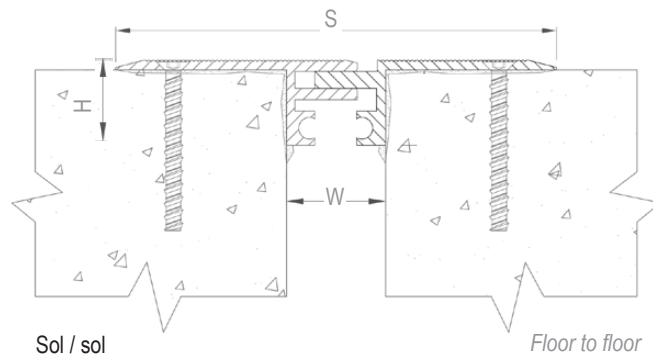

| Ref. JDH 6.34 | 6.34-035 | 6.34-050 |
|---|-----------------------|----------|
| W [mm] Ouverture / Gap | 35 | 50 |
| H [mm] Hauteur / Depth | 30 | |
| S [mm] approx. | 155 | 170 |
| Mouvements admissibles [mm] Movement capacities [mm] | +6 / -6 | +8 / -8 |
| Matériau / Material | Aluminium / Aluminium | |
| Longueur standard [ml] / Standard length [lm] | 4 | |
| Charges [kN] Load-bearing capacities [kN] | | |

Perçage, fraisage des cornières et pare vapeur sur demande. / Can be supplied drilled countersunk and vapour barrier upon request.

Fixations : nous consulter pour préconisation. / Fixings: please contact us for technical recommendation.

Existe en version sol/mur. / Floor to wall profile available.

The load-bearing capacity is always indicated for a joint in its initial position. In case of opening movements, the load-bearing capacity significantly reduces and the product will thus be only adapted for a light pedestrian traffic. The indicated load-bearing capacities are based on pneumatic wheels vehicles with a contact surface of 200x200 mm.

© All rights reserved - Non contractual drawings - 11/2021