
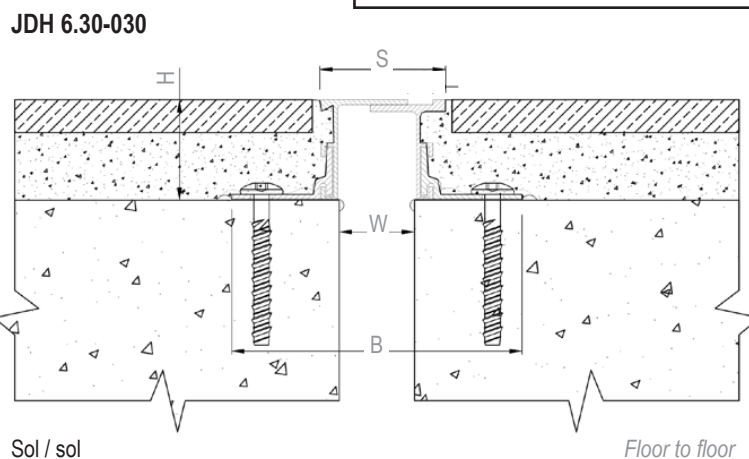


Joint de dilatation de sol pour intérieur constitué de cornières en laiton. Pour tous types de finitions : dalle, chape, carrelage, marbre...

Mechanical floor expansion joint made of brass side plates. For all types of finishes: screed, natural stone, cast stone, marble...

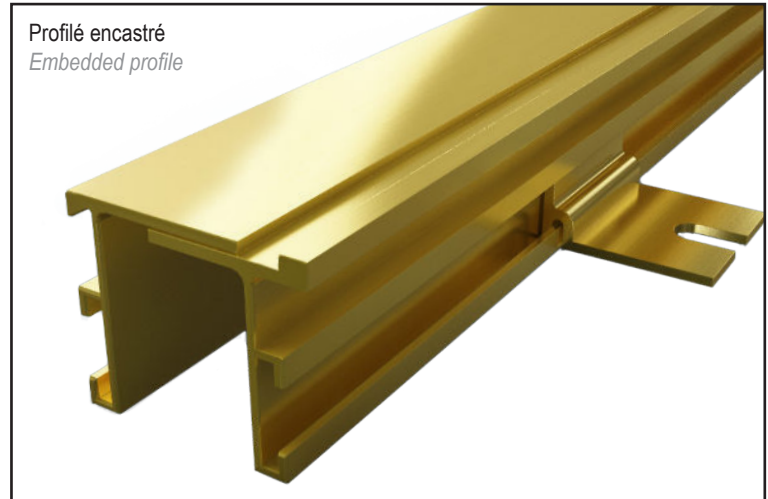

Ref. JDH 6.30	6.30-030
W [mm] Ouverture jusqu'à / Gap up to	30
H [mm] Hauteur / Depth	40
S [mm] approx.	50
B [mm] approx.	120
Mouvements admissibles [mm] <i>Movement capacities [mm]</i>	+10 / -10
Matériau / Material	Laiton / Brass
Longueur standard [m] / Standard length [m]	3
Equerres de fixations [par mètre] / Fixing pieces [per meter]	4 pcs
Charges <i>Loading-board capacities</i>	

Fixations : nous consulter pour préconisation. / Fixings: please contact us for technical recommendation.

The load-bearing capacity is always indicated for a joint in its initial position. In case of opening movements, the load-bearing capacity significantly reduces and the product will thus be only adapted for a light pedestrian traffic. The indicated load-bearing capacities are based on pneumatic wheels vehicles with a contact surface of 200x200 mm.

© All rights reserved - Non contractual drawings - 12/2021