

Joint de fractionnement

Control joint


Pose scellée / For bed affixed tiles

Joints de fractionnement de sol de la série JF Luxe 2700 sont destinés à prévenir les désordres (décollements, fissurations) qui ne manquent pas de se produire lorsque des revêtements de sols sont posés en grande surface sans joint. Ils sont utilisés pour fractionner les revêtements de sols tels que carrelage, céramique, pierre naturelle, marbre, granit, revêtement coulé, etc.

Les JF Luxe 2700 sont constitués de deux plats métalliques en aluminium, laiton ou inox reliés par une mousse adhésive compressible et d'un remplissage avec un mastic élastométrique neutre de grande qualité. Ce mastic est disponible dans plusieurs teintes et assure la finition et l'étanchéité du profilé.

Series JF Luxe 2700 control joints are designed to prevent the malfunctions (cracks, de-bonding) that systematically occur when flooring systems are installed in large areas without joints. Series JF Luxe 2700 aluminium, brass or stainless steel movement control joints are designed to partition rigid floors such as ceramic tiles, marble, granite, natural stone, etc.

They are made of two brass side plates bonded to a compressible adhesive foam and an elastomeric sealant. The Series JF Luxe 2700 aluminium, brass or stainless steel guarantees a very high quality decorative and luxurious finish. The stainless steel and brass side plates visible parts can be supplied either mill finish, satin finish or high gloss polished. The

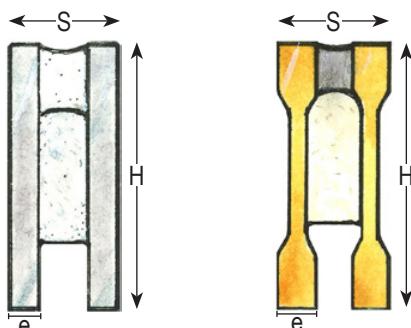

Ref. JF Luxe	JF Luxe 2700 /A /B /S
H [mm] Hauteur /	20 / 30 / 40 / 50
S [mm] approx.	10 / 15
e [mm] approx.	3 / 5
Mouvement admissible M [mm]	+1 / -1
Couleur de l'insert /	Mastic transparent, Blanc, beige*, gris*, noir / Sealant transparent, White, beige*, grey*, black
Matériau /	Aluminium, laiton, inox / Aluminium, brass, stainless steel
Longueur standard [m] /	3

*Variation de teintes disponibles / Colors variations available.

Les produits d'entretien ne doivent en aucun cas contenir d'acide chlorhydrique ou fluorhydrique et ne doivent pas être abrasifs. / They can be cleaned using standard cleaning products provided that they do not contain hydrochloric or hydrofluoric acids and are not abrasive.

© All rights reserved - Non contractual drawings - 03/2020



GV2 VEDA FRANCE
20, Allée des Erables - Bât. E - 93420 Villepinte - France
Adresse Postale
CS 63052 - 95972 Roissy CDG Cedex

Tél : + 33 (0)1 48 61 70 80
Fax : + 33 (0)1 48 61 70 81
E-mail : contact@vedafrance.com
Web : www.vedafrance.com