


Joint de dilatation de sol tout métal

All metal floor expansion joint


Series JDH 6.34

Joint de dilatation de sol aluminium pour extérieur et intérieur. Pour tous types de finitions : dalle, chape, carrelage, marbre...

Aluminium floor expansion joint for exterior and interior use. For all types of finishes: screed, natural stone, cast stone, marble...

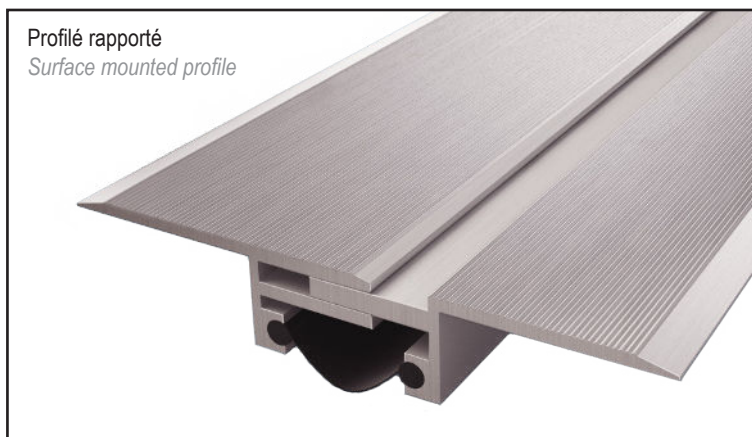

JDH 6.34-035

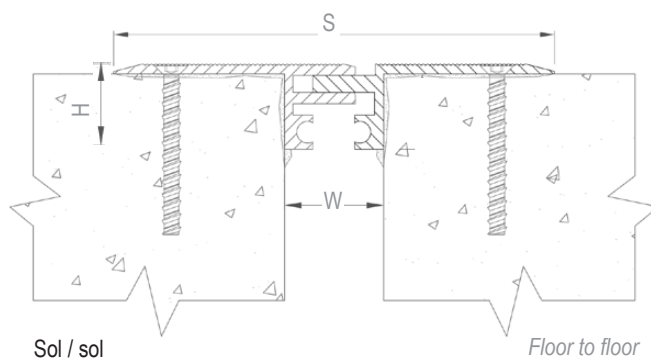

Ref. JDH 6.34	6.34-035	6.34-050
W [mm] Ouverture / Gap	35	50
H [mm] Hauteur / Depth	30	
S [mm] approx.	155	170
Mouvements admissibles [mm] Movement capacities [mm]	+6 / -6	+8 / -8
Matériau / Material	Aluminium / Aluminium	
Longueur standard [ml] / Standard length [lm]	4	
Charges [kN] Load-bearing capacities [kN]		

Perçage, fraisage des cornières et pare vapeur sur demande. / Can be supplied drilled countersunk and vapour barrier upon request.

Fixations : nous consulter pour préconisation. / Fixings: please contact us for technical recommendation.

Existe en version sol/mur. / Floor to wall profile available.

The load-bearing capacity is always indicated for a joint in its initial position. In case of opening movements, the load-bearing capacity significantly reduces and the product will thus be only adapted for a light pedestrian traffic. The indicated load-bearing capacities are based on pneumatic wheels vehicles with a contact surface of 200x200 mm.

© All rights reserved - Non contractual drawings - 11/2021

Système de management certifié

ISO 9001:2015

BUREAU VERITAS
Certification



GV2 VEDA FRANCE

20, Allée des Erables - Bât. E - 93420 Villepinte - France

Adresse Postale

CS 63052 - 95972 Roissy CDG Cedex

Tél : + 33 (0)1 48 61 70 80

Fax : + 33 (0)1 48 61 70 81

E-mail : contact@vedafrance.com

Web : www.vedafrance.com